Brookins
SERVICE STATION
EQUIPMENT
MEASURES • DISPENSERS • GAS CANS • DRAIN CANS • OILERS • CREEPERS • RADIATOR FILLERS

MODEL 1004

MODEL 104

FLOW CONTROL MEASURES

Flexible and rigid spout types in aluminum Lifetime Lustre Finish that shows no finger marks. Extra long spouts — easy action flow control valve that locks open. Patented clear drain bottom. Flexible Spout Models have extra-long, asbestos-packed tubing spout that will not unwind or leak. Rigid Spout Models have long swing spout with self-adjusting, leak-proof swivel.

MODEL	CAPACITY	MODEL	CAPACITY
101 (Flexible)	1 qt.	**1001** (Rigid)	1 qt.
102 (Flexible)	2 qt.	**1002** (Rigid)	2 qt.
104 (Flexible)	4 qt.	**1004** (Rigid)	4 qt.

MODEL 908

MODEL 808

FLOW CONTROL CRANKCASE FILLERS

Squat body with extra-long swinging spout for getting under hoods. Aluminum Lifetime Lustre Finish. Special non-spill top. Top and side handles make for easy use. Patented clear drain bottom. Flexible Spout Models feature leak-proof, asbestos-packed spout. Rigid Spout Models have self-adjusting leak-proof swivel.

MODEL	CAPACITY	MODEL	CAPACITY
805 (Flexible)	5 qt.	**905** (Rigid)	5 qt.
806 (Flexible)	6 qt.	**906** (Rigid)	6 qt.
808 (Flexible)	8 qt.	**908** (Rigid)	8 qt.

MODEL 1225

MODEL 1235

CANNED OIL DISPENSERS

Easy-cutting, case hardened blade cuts larger opening for quicker drainage. Aluminum Lifetime Lustre Finish. Patented clear drain bottom. Models 1281 and 1285 have leak-proof valve control; Models 1231 and 1235 do not. Rigid Spout Models have valve control and are self-supporting in oil intake.

MODEL	CAPACITY	MODEL	CAPACITY
1221 (Rigid)	1 qt.	**1231** (Flexible)	1 qt.
1225 (Rigid)	5 qt.	**1235** (Flexible)	5 qt.
		1281 (Flexible)	1 qt.
		1285 (Flexible)	5 qt.

MODEL 672

MODEL 512

COMBINATION MEASURES

Extra strong with either rigid or flexible spout. Heavy-gauge stock. Double-seamed and hot-dip galvanized after assembly.

MODEL	CAPACITY	MODEL	CAPACITY
511 (Rigid)	1 qt.	**671** (Flexible)	1 qt.
512 (Rigid)	2 qt.	**672** (Flexible)	2 qt.
514 (Rigid)	4 qt.	**674** (Flexible)	4 qt.

AUTOMATIC TRANSMISSION MEASURES

24″ Flexible tapered spout fits transmission openings. Aluminum Lifetime Lustre Finish. Exclusive 100 x 80 mesh screen for clean oil delivery. Patented clear drain bottom.

MODEL	CAPACITY	MODEL	CAPACITY
101AT (Flexible)	1 qt.	**808AT** (Flexible)	8 qt.
805AT (Flexible)	5 qt.		

MODEL 101AT

MODEL 1285AT

CANNED OIL DISPENSERS FOR AT FLUID

Easy-cutting, case hardened blade, leakproof. Aluminum Lifetime Lustre Finish. Ideal for 1 & 5 qt. cans. Model 1149F has 13″ flexible spout and tapered nozzle. Model 1148 has extra long 17″ flexible spout with tapered nozzle, removable screen, no cutting blade. Models 1140 and 1149 are Funnel Type Dispensers for 1 qt. cans, self-supporting, closed curved spout. Models 128AT and 1285AT are equipped with easy cutting, case hardened blade which cuts larger opening for quick drainage.

MODEL	CAPACITY	MODEL	CAPACITY
1140 (Rigid)	1 qt.	**1149F** (Flexible)	1 & 5 qt.
1149 (Rigid)	1 & 5 qt.	**1281AT** (Flexible)	1 qt.
1148 (Flexible)		**1285AT** (Flexible)	5 qt.



MODEL 1149F

MODEL 1140

MODEL 1149

MODEL 1148

OIL DRAIN CAN

Large funnel on telescoping tube — 70″ when raised, 40″ when lowered. Machine set-screw holds funnel at desired height. Reinforced bottom and top. Finished in red or white enamel.

MODEL	CAPACITY	MODEL	CAPACITY
405 (Red)	5 gal.	**405W** (White)	5 gal.

MODEL 315

MODEL 405

MASTER MEASURE

Extra heavy metal, strongly reinforced. Protected gauge — graduated in cubic inches from 1 to 15 above and below zero. Has adjusting and sealing device. Heavy, half-round strap carrying handle. Concave bottom. Finished in red enamel.

MODEL	CAPACITY
315	5 gal.

MODEL 1146

POURSPOUTS

For dispensing canned oil. Copper Nickel Plated Finish. Single thrust cuts and clamps pourspout to can for pouring. Quick, simple, one-hand operation.

MODEL	CAPACITY	MODEL	CAPACITY
1110	1 qt. & smaller	**1145**	1 & 5 qt. (Same as Model 1135 but smaller)
1121	1 qt.		
1125	1 & 5 qt.		
1135	1 & 5 qt.	**1145P** (Painted)	1 & 5 qt.
1135G	1 & 5 qt. w/gasket	**1146**	1 & 5 qt. AT Service
1135P (Painted)	1 & 5 qt.		

MODEL 1110

MODEL 1135 or MODEL 1145



MODEL 1125 or MODEL 1121

Brookins SERVICE STATION EQUIPMENT

MODEL 501

MODEL 553

MODEL 551

MODEL 564

MODEL 546A

MODEL 555

MODEL 554T

MODEL 673

MODEL 402



MODEL 677

OVAL RADIATOR FILLER

New oval radiator filler with special curved spout to reach all types of radiator intakes. Rest lug, pistol grip, swinging bail handle with wood grip.

MODEL	CAPACITY
501	12 qt.

FUNNELS

Lock seams, hot-dip galvanized to resist rust and corrosion. Equipped with strainer and baffle, except Model 546A. All funnel spouts are grooved for air-venting. Model 546A has tapered spout to fit openings of 1" and larger.

MODEL	CAPACITY	SIZE
544	1 qt.	4⅛" dia.
546A	2 qt.	6" dia.
551	8 qt.	11⅞" dia.
553	8 qt.	11⅞" dia.

TIN UTILITY FUNNELS

New, low-cost tin utility funnels for power motors, outboards, garage, gasoline, home and shop use.

MODEL	CAPACITY	SIZE
560	¼ pt.	2¾" dia.
561	½ pt.	3½" dia.
562	1 pt.	4½" dia.
563	1 qt.	5¾" dia.
564	2 qt.	6½" dia.
565	4 qt.	7¾" dia.
566	6 qt.	9¼" dia.

TRACTOR FUNNELS

Model 554T fits all three commonly used farm tractor gas filler necks. Locks on so both hands can be used for pouring. Hand galvanized. Removable bronze screen. Model 555 equipped with skirt to enable funnel to rest securely on tractor or article to be filled so that operator can use both hands for pouring.

MODEL	CAPACITY	SIZE
554T	15 qt. (Min.)	10" dia.
555	12 qt.	11" dia.

BATTERY FILLERS

Model 402 one piece, rigid polyethylene Battery Filler with large handle and wide base. Shuts off automatically at correct battery level. Model 401 electrically welded steel frame with hose and hydrometer support. Vent tube. Red enamel finish.

MODEL	CAPACITY
402	2¼ qts.

DRAIN PANS

Model 677 one-piece Seamless Drain Pan, heavy galvanized sheet steel. Ribbed bottom and sides for extra strength. 3 point suspension handles. Won't leak, slip or tilt. Model 673 Utility Pan for washing parts and draining small radiators and crankcases. Flanged lip for carrying.

MODEL	CAPACITY	MODEL	CAPACITY
673	3¼ gal.	677	6 gal.

OVAL PLASTIC RADIATOR FILLER

New Oval Plastic Radiator Filler, light weight, perfectly balanced, won't scratch or mar finish, won't crack or break. Long, special curved spout with rest lug. 5" opening, bottom finger grip and wide base. Impervious to grease, oil and anti-freeze.

MODEL	CAPACITY
505	3 gal.

MODEL 505

WOOD CREEPERS

Model 271 Heavy-duty Creeper with hardwood frame, three double thickness center supports and comfortable headrest. Model 272 Creeper with adjustable headrest. Finger tip adjustment raises head and shoulders to any of six comfortable working positions. Sponge rubber headrest. "Easy-Over" casters roll creepers in any direction over roughest floors. Model 274 Economy Creeper, full size, 36" long. Equipped with Model 494 Casters.

MODEL	SIZE
271	36" x 15½"
272	42" x 15½"
274	36" x 15"

"Easy-Over" Casters MODEL	SIZE
491	3" dia.
494	2½" dia.

MODEL 271

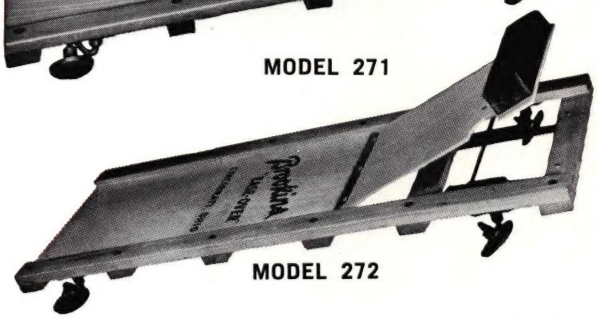

MODEL 272

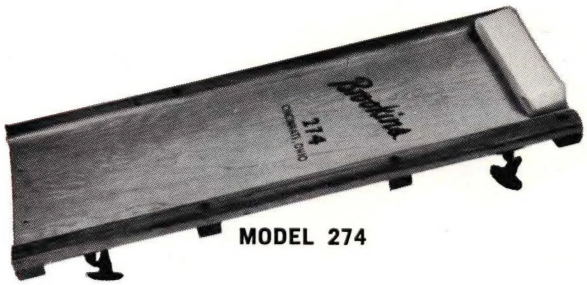

MODEL 274

MECHANICS SEAT AND TOOL TRAY

Combination seat and handy tool tray. Ideal for brake work, wheel alignment, body repair and many other uses. Shipped knocked down.

MODEL	SIZE
273	14" x 18" x 12"

MODEL 273

OILY WASTE CANS

Hot-dip galvanized, extra heavy sheet steel. Top and bottom reinforced with steel hoops. Underwriters' Laboratories approved. Lid will not stay open unless blocked.

MODEL	CAPACITY	MODEL	CAPACITY
605	5.1 gal.	608	8.1 gal.



MODEL 608

TIRE AND TUBE TESTER

Heavy-duty galvanized container with reinforced edges. Takes balloon tubes and tubeless tires. Equipped with carrying handles.

MODEL	SIZE
606	31½" x 12" x 12"

MODEL 606

Brookins
SERVICE STATION
EQUIPMENT

MODEL 85

MODEL 35

OIL BOTTLE AND RACK

Tough, annealed, thick-walled glass bottle with "Sealers Approval". Rugged spout fits any 1 qt. bottle with mason jar threads. 8 compartment metal carrying basket, electric welded and painted to prevent rusting.

MODEL	DESCRIPTION
25	Metal Spout, Dust Cap and Gasket
25P	Plastic Spout & Dust Cap
30	1 qt. Bottle only
35	1 qt. Bottle, Dust Cap, Spout & Gasket
80	8 Bottle Set Complete with Basket
85	Metal Carrying Basket

(See Price Sheet for Spout Accessories not listed here.)

MODEL 695

GAS CANS

26 gauge galvanized steel. Seamless drawn body — no top or side seam. Bottom double seamed to body. 6" flexible spout and strainer screen. Air vent for faster pouring. All models have flexible spout.

MODEL	CAPACITY	MODEL	CAPACITY
691	1 gal.	692½A	2½ gal. with oil cup
692½	2½ gal.	695	5 gal.

MODEL 682

HEAVY-DUTY GAS CANS

24 gauge seamless, welded steel container with hose clips, ears, and spout welded to body. Flexible, detachable spout. Automatic air vent for fast pouring. Red enamel finish.

MODEL	CAPACITY	MODEL	CAPACITY
682	2½ gal.	685	5 gal.

MODEL 686

MODEL 688

SAFETY GAS CANS

One piece, no-seam body, approved by Underwriters Laboratories and Factory Mutual. Combination free-swinging carry and operating handle. Equipped with flash arresting screen. Model 688 Pour Spout fastens to lip of can. (Must be ordered extra.)

MODEL	CAPACITY	MODEL	CAPACITY
686	2½ gal.	689	1 gal.
687	5 gal.	688 Spout	



MODEL 701



MODEL 802

GASOLINE CANS

Equipped with vent and flexible metal pouring spout. Vent allows fast pouring. Models 801 and 802 store reversible flexible spout inside can when not in use.

MODEL	CAPACITY	MODEL	CAPACITY
701	1 gal.	801 (Rev. Spout)	1 gal.
702	2 gal.	802 (Rev. Spout)	2 gal.

SOLID BODY OILERS

Drawn steel body with double seam bottom.

MODEL	DESCRIPTION
353A	⅓ pt. cap., 3″ Rigid Spout
353B	⅓ pt. cap., 5″ Rigid Spout
353C	⅓ pt. cap., 9″ Rigid Spout
354	⅓ pt. cap., 8″ Flexible Spout

MODEL 354

MODEL 314

PISTOL TYPE OILERS

Delivers positive stream. Trigger action plunger pumps fluid at high pressure. Comfortable hand fit. Guaranteed 5 years.

MODEL	DESCRIPTION
314	Seamless steel, 6 oz. cap., 6″ Seamless Spout
314F	Seamless steel, 6 oz. cap., 6″ Flexible Spout
320	Polished brass, 5½ oz. cap., 5¾″ Rigid Spout
320F	Polished brass, 5½ oz. cap., 6½ Flexible Spout w/Cap
321	Clip (For Model 320)
351	Nickel-plated, 6 oz. cap., 6″ Spout
352	Aluminum Paint, 6 oz. cap., 6″ Spout
352C	Clip (For Model 352)
364	4 oz. cap., 3″ Rigid Spout



MODEL 320

MODEL 364

MODEL 351

PUMP TYPE OILERS

Positive action pumping unit — trigger control. Guaranteed 5 years.

MODEL	DESCRIPTION
324	¾ pt. cap., 6″ Rigid Spout
355	¾ pt. cap., 8″ Flexible Spout
356	1 pt. cap., 13½″ Flexible Spout
357	1 qt. cap., 13″ Flexible Spout

MODEL 355

MODEL 324

HANDI-GRIP OILERS

Leakproof bodies — powerful pump mechanism. Guaranteed 5 years. Delivers oil in full stream or one drop only depending on pressure applied.

MODEL	DESCRIPTION
360	¾ pt. cap., 6″ Angled Rigid Spout
360F	¾ pt. cap., 7⅝″ Flexible Spout
361	1 pt. cap., 6″ Angled Rigid Spout
361F	1 pt. cap., 7⅝″ Flexible Spout
362	1½ pt. cap., 6″ Angled Rigid Spout
362F	1½ pt. cap., 7⅝″ Flexible Spout
363	1 qt. cap., 6″ Angled Rigid Spout
363F	1 qt. cap., 7⅝″ Flexible Spout

MODEL 360

MODEL 361F

BLOW GUN

Blows out radiators, cleans gas lines, drys wet coils and other blowing and drying jobs. Light, durable, pistol hand-grip for perfect control. Snaps on Schrader, Dill or other air chucks.

MODEL	DESCRIPTION
2643	Pistol Type, 8″ Seamless Air Tube



MODEL 2643

SPRAYER CLEANER

Combination sprayer, cleaner and paint gun. Sprays lightest penetrating oil, heavy graphite spring oil or paint. Snaps on Schrader, Dill or other air chucks.

MODEL	CAPACITY	MODEL	DESCRIPTION
2805	1 qt.	2807FS	Fanspray Nozzle



MODEL 2807FS

MODEL 2805

Brookins SERVICE STATION EQUIPMENT

MODEL 450

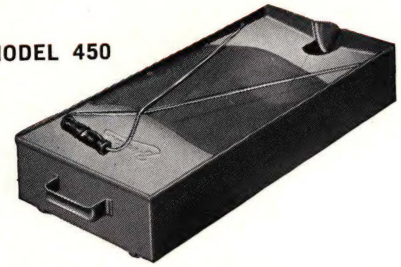

MODEL 650

MODEL 500

MODEL 1500

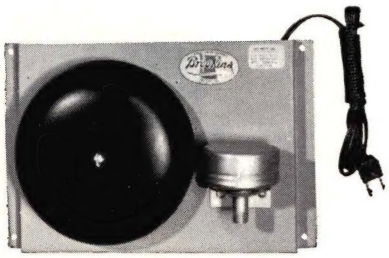

MODEL 1503

MODEL 1504

MODEL 1502

42202 DISPLAY STAND

CRANKCASE DRAIN TANK

Heavy-metal, mounted on skids with improved baffle and screen to prevent splash.

MODEL	DESCRIPTION
450	4 gal. cap., 27″ x 11¼″ x 5″, red enamel finish

GARAGE PAIL

Sturdy, galvanized pail formed from heavy black steel. Galvanized throughout after assembly.

MODEL	CAPACITY
500	12 qt.

ALCOHOL DISPENSER

Dispenses kerosene, alcohol and light oil with air pressure. Fits ¾″ bung holes. 36″ flexible tubing. Safety valve releases pressure above 9 lbs.

MODEL
650

DRIVEWAY SIGNAL

New improved design uses 110 volt current only when ringing. 6″ firehouse bell operated by all-new type plunger, protected switch with control adjusted to any station needs. Stops ringing if car stops on hose. Can be used with up to 300 ft. of hose.

MODEL	SIZE
1500	Electric Driveway Signal
1501	Electric Driveway Signal with Model 1502 Hose Anchor & End Plug, Model 1503 Connector Assembly
1502	Hose Anchor & End Plug
1503	5′ Aluminum Tubing & Brass Fitting Connector Assembly
1504	Hose Y Fitting for connecting 3 Hoses
1505	⅜″ I.D. x ½″ O.D. Heavy Duty Hose (Order as required)

42202 DISPLAY STAND

FREE with $100.00 stock order.

Saves Space — Time

Keeps Store Neat

Sells and Keeps Selling more Brookins Equipment.

This beautiful display stand lures customers, invites them to inspect your line and sells more Brookins Equipment for you. Rugged, light and easy to move. Compact — holds 14 Brookins items.

Stand Only

Size: 26″x15½″x63½″

CONTROL HANDLES

HIGH PRESSURE CONTROL HANDLES

All steel 3-way swiveling control handle. Adjustable valve opening for volume control. Single shot or continuous flow operation.

Model 1319-AX — Control Handle, Lance and Coupler, ½" 27 F.T. 3796

Model 1319-BX — Same as Model 1319-AX, except with #44096X Swivel, ½" 27 M.T.

Model 1319-CX — Same as Model 1319-BX, except with #42054X Pressur-Matic. 62

BOOSTER HIGH PRESSURE CONTROL HANDLES

Up to 12,000 lbs. pressure. Doubles regular pump pressure. Operates the same as regular high pressure control handle except squeeze handle again when higher pressures are required. Bleeder valve for easy release of hydraulic coupler.

Model 1329-SX — Booster Control Handle with #44096X Ball-bearing 3-way Swivel, Hydraulic Lance and Coupler, ½" 27 M.T..

Model 1329X — Same as Model 1329-SX, except without Swivel, ½" 27 F.T.

Model 1329-SPX — Same as Model 1329-SX, except with #42054X Pressur-Matic for low pressure application.

PRESSUR-MATIC

Model 42054X — Pressur-Matic can be permanently installed on any make of H.P. Control Handle for properly servicing points requiring either high or low pressure lubrication. Reduces grease pressure to approximately 8 times air pressure for low pressure lubrication. Does not reduce volume either high or low. Push knurled sleeve forward for low pressure, back for high pressure. ⅛" M.P.T. outlet — ⅛" F.P.T. inlet.

HAND GUNS

Model 2271X — Spring-Primed High Pressure Lever Gun, 18 oz. capacity, 7" Curved Hydraulic Adapter with ⅛" P.T. Develops 10,000 lbs. working pressure. Handles all types of commonly used lubricants.

Model 2274X — Spring-Primed Cartridge Gun for grease cartridges or bulk grease. 20 oz. bulk grease capacity. Curved Hydraulic Adapter with ⅛" P.T. Develops 10,000 lbs. working pressure.

Model 2275X — "Handi-Grip" One Hand Grease Gun for grease cartridges or bulk grease. 20 oz. capacity. New double cup, two-way plunger. Develops up to 27" vacuum. Positive locking plunger lock.

Model 2276X — Suction Gun, 1¼ pt. or 17 oz. by weight oil capacity. 12" Flexible Vinyl Plastic Hose, ⅜" I.D. No-leak Plunger.

Model HA-14X — Filler Pump. Fits directly onto 25, 35 or 40 lb. refinery pails. Fills any filler-type hand gun by using furnished filler nipple. Handles all types of commonly used lubricants. Includes #64046X Filler Valve and #64047X Nipple.

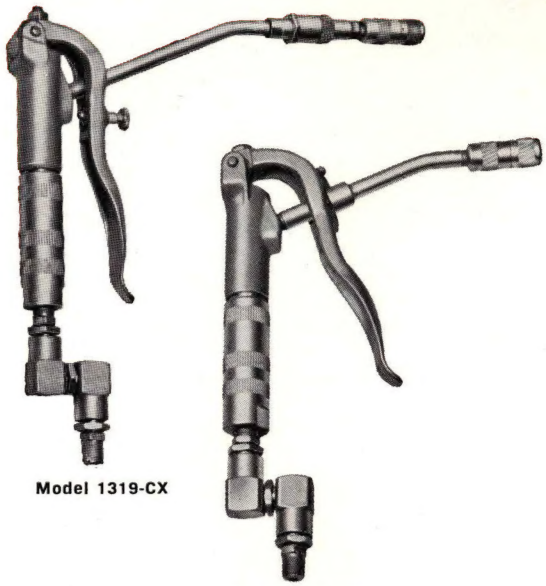

Model 1319-CX

Model 1329-SX

Model 42054X



Model 2271X



Model 2274X

Model 2276X

Model HA-14X

Model 2275X

Brookins SERVICE STATION EQUIPMENT

Model OP202X

Model OP201X

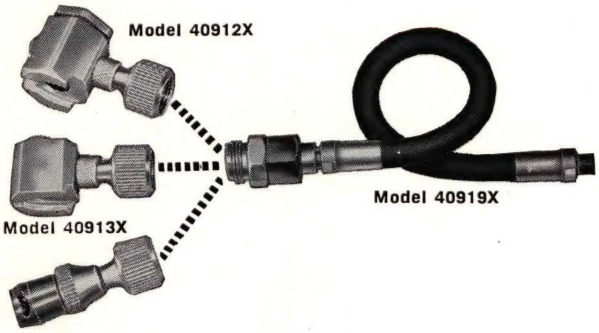

Model 44096X

Model 45076X Model 349X Model 40892X

Model 39129X Model 39130X



Model OP201X — Piston Type "double-acting" Hand Pump with spout. Pumps gasoline, oils, solvents, alcohols and other miscellaneous liquids. Lightweight. Aluminum and stainless steel construction for trouble-free operation. High vacuum insures self-priming. 20 gal/minute capacity per 100 strokes. 1" inlet, ¾" outlet. Totalizing counter or meter extra.

Model OP202X — Piston Type "double-acting" Hand Pump. Same as Model OP201X, except with hose.

See Supplement Page 18 for Detail Information.

ADAPTERS FOR HAND GUNS

Model 40919X — 12" 3/16" I.D. High Pressure Hose #40917-12X with ¾" 16 M.T. Swivel. (For use with #40912X, 40913X and 40914X)

Model 40912X — Giant Buttonhead Coupler with ¾" 16 F.T.

Model 40913X — Standard Buttonhead Coupler with ¾" 16 F.T.

Model 40914X — Pin-type Coupler with ¾" F.T.

HIGH PRESSURE BALL BEARING SWIVELS

Model 44096X — 3-way Ball Bearing "Z" Swivel, ½ 27 M.T. both ends. (Also available skin packed. Order 44096XSP)

Model 44097X — 90° Outlet Swivel, ½ 27 M.T. both ends.

HYDRAULIC COUPLERS

Model 349X — Single sealing and gripping piston. Reversible jaws. (Also available skin packed. Order 349XSP)

Model 45076X — ⅝" O.D. Standard, for hand operated guns only.

Model 40892X — Dual sealing and gripping pistons operating independently. The higher the pressure, the harder it grips. Reversible jaws.

Model 24093X — Extra Jaws, set of 3, for #40892X and #349X.

Model 64071X — Extra Jaws, set of 3, for #45076X.

QUICK AIR COUPLERS AND NIPPLES

Provide quick connections and disconnections without waste of air or use of wrenches. For air-operated equipment and tools.

Model 39129X — Volume Insert Nipple, ⅜" M.P.T. (For #39130X Coupler only)

Model 39130X — Volume Swiveling Coupler, ⅜" F.P.T. (For Giant-Jet Pumps)

Model 44940X — Swiveling Coupler, ¼" F.P.T. (Also available skin packed. Order 44940XSP)

Model 63403X — Insert Nipple, ¼" M.P.T. Used with #44940X. (Also available skin packed. Order 63403XSP)

Model 63404X — Insert Nipple, ¼" F.P.T. Used with #44940X.

Model 63402X — Insert Nipple, ⅛" M.P.T. Used with #44940X. (Also available skin packed. Order 63402XSP)

HYDRAULIC ADAPTERS

Model 39972X — 8½" Pipe only, ⅛" M.P.T.

Model 63951X — 6½" Pipe only, ⅛" M.P.T.

Model 25931X — 90° Hydraulic to hydraulic with Lock Sleev #42395X.

Model 40917-8X — 8" Whip Hose only, 3/16" I.D., 10,000 lbs. burst test, ⅛" M.P.T. both ends.

Model 40917-12X — 12" Whip Hose only, 3/16" I.D., 10,000 lbs. burst test, ⅛" M.P.T. both ends.
(Also available skin packed. Order 40917-12XSP)

Model 40917-18X — 18" Whip Hose only, 3/16" I.D., 10,000 lbs. burst test, ⅛" M.P.T. both ends.

Model 42463-8X — #40917-8X with #349X Coupler and #42395X Lock Sleeve.
(Also available skin packed. Order 42463-8XSP)

Model 42463-12X — #40917-12X with #349X Coupler and #42395X Lock Sleeve.

Model 42463-18X — #40917-18X with #349X Coupler and #42395X Lock Sleeve.

Model 42464X — 360° Hydraulic to hydraulic Swivel Coupler, with #42395X Lock Sleeve.

Model 42650X — 360° Swivel, locks in 18 positions. Attaches to any standard hydraulic coupler and any make control handle without adapter. No lever or latch sleeve. Positive automatic lock in each position. Dual lock when pressure is applied. ⅛" F.P.T. x ⅛" M.P.T.

Model 42699X — Same as #42650X, with #349X Hydraulic Coupler.

Model 42799X — #41197X Hydraulic Extension with #42395X Lock Sleeve, 10" overall.

Model 40906X — Swiveling "T" Handle Hydraulic Adapter.

Model 41248X — 8" Straight Hydraulic Adapter, ⅛" M.P.T.

Model 41197X — 8" Curved Hydraulic Adapter, ⅛" M.P.T., with #349X Hydraulic Coupler.

Model 41424X — Hydraulic Lance with Adapter, ½ 27 M.P.T.

Model 42536X — 3" Hydraulic Adapter, ¾" 16 F.T.

Model 39972X

Model 63951X

Model 40917-12X

Model 42463-12X

Model 42464X

Model 42699X

Model 42650X

Model 41197X

Model 42799X

Model 41248X
Model 41424X
Model 40906X
Model 42536X

Model 42984X

Model 42983X

Model 40737X

BUTTONHEAD ADAPTERS

Model 40737X — Standard Buttonhead Coupler only — push-on.

Model 42983X — Standard Buttonhead Coupler, pull or hook-on, ⅛" female pipe adapter.

Model 42984X — Giant Buttonhead Coupler, ⅛" female pipe adapter.

BUTTON HEAD FITTINGS

Model 30619X — ⅛" PT Standard Button Head.
Model 17022X — ¼" PT Standard Button Head.
Model 34573X — ⅜" PT Standard Button Head.
Model 34574X — ½" PT Standard Button Head.
Model 30772X — ⅛" PT Giant Button Head.
Model 33951X — ¼" PT Giant Button Head.
Model 34575X — ½" PT Giant Button Head.
Model 34576X — ⅝"-18 Th Giant Button Head.
Model 34577X — ⅜" PT Giant Button Head.

Model 30619X

Model 33951X

Brookins
SERVICE STATION
EQUIPMENT

Model 42466X

Model 44229X

Model 44230X

Model 42395X

Model 42609X

Model 44475X

Model 44469X

Model 44467X

Model 44471X

Model 44477X

Model 44473X

MISCELLANEOUS ADAPTERS

Model 42466X — 7″ Hydraulic Push-type Extension Adapter with Lock Sleeve for recessed hydraulic fittings.

Model 44229X — Whip Hose with Standard Buttonhead Coupler and Lock Sleeve, 15″ overall.

Model 44230X — Whip Hose with Giant Buttonhead Coupler and Lock Sleeve, 15″ overall.

Model 42395X — Lock Sleeve only.

Model 42609X — 4¼″ Needle-type Adapter with Lock Sleeve.
(Also available skin packed. Order 42609XSP)

SPECIAL ADAPTERS FOR LATE MODEL CARS

Model 44475X — 8″ Hose with ¼″ 28 Thread Swivel Adapter and Lock Sleeve.
(Also available skin packed. Order 44475XSP)

Model 44469X — Rubber Tipped Adapter.
(Also available skin packed. Order 44469XSP)

Model 44467X — 8″ Hose with ¼″ 28 Thread Swivel Adapter.
(Also available skin packed. Order 44467XSP)

Model 44471X — Hydraulic to ¼″ 28 Adapter.
(Also available skin packed. Order 44471XSP)

Model 44477X — Rubber Tipped Adapter with Lock Sleeve.
(Also available skin packed. Order 44477XSP)

Model 44473X — Needle Type Adapter with Lock Sleeve.
(Also available skin packed. Order 44473XSP)

Model 2920

Model 2923

Model 2921

Model 2922

BRAKE BLEEDER AND ADAPTERS

Model 2920 — Speedbleeder Brake Bleeder, positive spring pressure, no gauges, operates without air pressure, connects without wrenches.

Model 2921 — Universal Adapter.

Model 2922 — Adapter for Chrysler and GMC.

Model 2923 — Adapter for Ford.

Brookins SERVICE STATION EQUIPMENT

HIGH PRESSURE HOSE CONNECTORS

Model 23901-AX

Model 30784X

For joining various brands of hose and equipment where thread sizes are irregular. Carefully machined with long threads to withstand high pressure and prevent leaks.

Model 38111X — ⅛" M.P.T. by ⅛" M.P.T. Adapter. (Steel)
Model 18274X — ⅛" F.P.T. by ¼" M.P.T. Bushing. (Steel)
Model 33405X — ⅛" M.P.T. by ¼" F.P.T. Adapter. (Steel)
Model 30784X — ⅛" M.P.T. by ½-27 F.T. Adapter. (Steel)
Model 16717X — ¼" F.P.T. by ⅜" M.P.T. Bushing. (Steel)
Model 32110X — ¼" F.P.T. by ½" M.P.T. Bushing. (Steel)
Model 28471X — ⅜" F.P.T. by ½" M.P.T. Bushing. (Steel)
Model 27650X — ½-27 M.T. by ½" M.P.T. Adapter. (Steel)
Model 35503X — ½-27 F.T. by ½" M.P.T. Bushing. (Steel)
Model 22999X — ½"-27 M.T. by ½"-27 M.T. Adapter. (Brass)
Model 23900X — Set of 20 assorted Connectors, 4 each of #23901-AX, BX, CX, DX and #22999X.
Model 23901-AX — ⅛" M.P.T. by ½"-27 M.T. Adapter. (Brass)
Model 23901-BX — ¼" M.P.T. by ½"-27 M.T. Adapter. (Brass)
Model 23901-CX — ⅛" F.P.T. by ½"-27 M.T. Adapter. (Brass)
Model 23901-DX — ¼" F.P.T. by ½"-27 M.T. Adapter. (Brass)
Model 34289X — ½-27 F. by ¼" F.P.T. Adapter. (Steel)
Model 63816X — ½-27 F. by ⅛" F.P.T. Adapter. (Steel)
Model 63817X — ½-27 F. by ¼" M.P.T. Adapter. (Steel)
Model 23724X — ⅛" F.P.T. by 7/16"-27 M.T. Adapter (Steel)

BROOKINS ADAPTER ASSORTMENT

No. 45030X — Adapter Assortment for adapting High Pressure Control Handles, Hoses and Swivels to all makes of equipment and connecting Brookins Extension Hoses to all makes of hoses. Plastic box contains 30 assorted Adapters — 4 — 22999X, 4 — 23901AX, 4 — 23901BX, 3 — 23901CX, 3 — 23901DX, 4 — 30784X, 2 — 34289X, 3 — 63816X, 3 — 63817X.

REPLACEMENT HOSE

HIGH PRESSURE CHASSIS HOSE

Model No.	Inside Diameter	Outside Diameter	Couplings	Maximum Recommended Working Pressure P.S.I.	Minimum Burst Pressure P.S.I.	Length In Feet
42677X	¼"	¾"	½"-27FBE	6,700	20,000	1, 1½, 5, 6½, 7, 10, 15, 20, 30, 40, 50

GEAR OIL, MOTOR and ATF HOSE — Air Operated Units

Model No.	Inside Diameter	Outside Diameter	Couplings	Maximum Recommended Working Pressure P.S.I.	Minimum Burst Pressure P.S.I.	Length In Feet
43433X	7/16"	27/32"	⅜"MBE	3,000	11,000	6½, 20
43790X	½"	⅞"	⅜" MBE	625	3,000	5, 6, 16, 20, 30, 40, 50

AIR and WATER HOSE

Model No.	Inside Diameter	Outside Diameter	Couplings	Maximum Recommended Working Pressure P.S.I.	Minimum Burst Pressure P.S.I.	Length In Feet
19708X	5/16"	⅝"	¼"MBE	300	1,200	1½, 3, 5, 25

When ordering: Specify hose number and add suffix number to indicate length required. Example: for Hose #42677X in a 10′ length, order #42677-10X.

Note:
MBE — Male Both Ends
FBE — Female Both Ends
M — Male
F — Female

Brookins SERVICE STATION EQUIPMENT

Model 2900

Model 2903

Model 2902

Model 2905

Model 2904

Model 2906

Model 2907

Model 63942X

ACCESSORIES

Model 2900 — Automatic Tire Inflator (Passenger Car) provides automatic inflation for 15 to 45 lbs., without hose or chuck.

Model 2900R — Rebuilt Model 2900 — Exchange basis only.

Model 2900A — Same as Model 2900, with 12″ Hose and Single Chuck.

Model 2900B — Same as Model 2900, with 12″ Hose and Dual Chuck.

Model 2900C — Same as Model 2900, with 12″ Hose and Grip Chuck.

Model 2900D — Same as Model 2900, with Handi-Chuck.

Model 2901 — Automatic Tire Inflator (Truck) provides automatic inflation from 10 to 110 lbs., without Hose or Chuck.

Model 2901R — Rebuilt Model 2901 — Exchange basis only.

Model 2901A — Same as Model 2901, with 12″ Hose and Dual Chuck.

Model 2901B — Same as Model 2901, with 12″ Hose and Grip Chuck.

Model 2901C — Same as Model 2901, with Long Rigid Dual Chuck.

Model 2902 — 12″ Hose with Single Chuck.

Model 2903 — 12″ Hose, male fittings both ends.

Model 2904 — Handi-Chuck.

Model 2905 — Grip Chuck.

Model 2906 — 6″ Dual Foot Chuck.

Model 2907 — 12″ Long Rigid Dual Foot Chuck.

Model 63942X — Tire Inflator with Single Chuck. Registers from 15 to 90 lbs. All weather cap and rubber sleeve. Lightweight. ¼″ FPT inlets.

Model 63943X — Tire Inflator with Double Chuck. Same as Model 63942X except with positive action, swivel double chuck end. ¼″ FPT inlets.

Model HWA 524X

Model HM 524X

Model 32484X

Model 41640X

Model LP-102X



Model LP-103X

Model 60013X

Model 60014X

Model HM524X — Spring Spray, 1 qt. capacity. Air Operated adjustable spray control, nickel finish.

Model HWA524X — Spring Oiler, 1 qt. capacity. Hand trigger type, nickel finish.

Model 41640X — Air Blow Gun for cleaning and drying operations. Zinc alloy for heavy duty use.
(Also available skin packed. Order 41640XSP)

Model 32484X — Water Faucet, aluminum alloy casting, brass plated nozzle, ¼″ F.P.T.

Model 32484-1X — Same as #32484X, with ¾″ garden hose thread.

Model LP-102X — Wheel Bearing Packer, 1 lb. capacity of lubricant for automotive bearings up to 4″.

Model LP-103X — Economy Wheel Bearing Packer for use with multipurpose type lubricants. Handles automotive ball or roller type bearings from ⅝″ I.D. to 3¼″ O.D.

Model T-300X — Wheel Bearing Packer, 6 lb. capacity of lubricant for automobile, airplane, truck and industrial bearings. Handles bearings from 1¼″ I.D. to 7½″ O.D.

Model 60013X — Easy Out Tool, ⅛″ P.T.
(Also available skin packed. Order 60013XSP)

Model 60014X — Easy Out Tool, ¼″-28TH
(Also available skin packed. Order 60014XSP)

¼″-28 TAPER THREAD

B-641X — ¼″-28 Taper short, with Ball Check.
(Also available skin packed. Order B-641XSP)
B-652X — ¼″-28 Taper long, with Ball Check.
B-637X — ¼″-28 Taper, 45° angle short, Ball Check.
B-636X — ¼″-28 Taper 45° angle long, Ball Check.
(Also available skin packed. Order B-636XSP)
B-911X — ¼″-28 Taper, 90° angle short, Ball Check.
(Also available skin packed. Order B-911XSP)
B-914X — ¼″-28 Taper, 90° angle long, Ball Check.
B-698X — ¼″-28 Taper Th. Str. Ball Check, 1-3/32′ long, (Not Ill.)

¼″ PIPE THREAD

B-627X — ¼″ PT with Ball Check.
B-629X — ¼″ PT, 67½° angle, Ball Check.
B-691X — ¼″ Female PT with Ball Check.

BROOKINS FITTINGS ASSORTMENTS

B-1120X SERVICE STATION STOCK — Plastic Box, 25-B610X, 5-B611X, 5-B612X, 8-B613X, 7-B636X, 35-B-641X, 5-B710X, 5-B711X, 5-B911X. Total 100 fittings.

B-1120X
OPEN

⅛″ PIPE THREAD

B-610X — ⅛″ PT with Ball Check.
(Also available skin packed. Order B-610XSP)
B-611X — ⅛″ PT, 30° angle, Ball Check.
(Also available skin packed. Order B-611XSP)
B-688X — ⅛″ PT, 45° angle, Ball Check.
(Also available skin packed. Order B-688XSP)
B-612X — ⅛″ PT, 67½° angle, Ball Check.
(Also available skin packed. Order B-612XSP)
B-613X — ⅛″ PT, 90° angle, Ball Check.
(Also available skin packed. Order B-613XSP)
B-638X — ⅛″ PT, 30° angle, Ball Check.
B-669X — ⅛″ PT with Ball Check.
B-607X — ⅛″ PT, Str., Ball Check, 1¼″ long. (Not Ill.)

BUSHINGS

B-715X — ⅛″ MPT to ⅛″ FPT pressure relief.
B-716X — ¼″ MPT to ⅛″ FPT pressure relief. (Not Ill.)
B-717X — ⅛″ PT extension, ¾″ long.
B-718X — ⅛″ PT extension, 1¼″ long.

SPRING AND DRIVE TYPE

B-710X — ⅜″-24 Th with Ball Check.
(Also available skin packed. Order B-710XSP)
B-711X — 5/16″-24 Th with Ball Check.
(Also available skin packed. Order B-711XSP)
B-608X — 5/16″ Drive with Ball Check.
B-699X — 5/16″ Drive without Ball Check.
B-511X — 3/16″ Drive with Ball Check (not illustrated).
B-626X — ½″ Drive, Str., No Ball Check. (Not Ill.)

Brookins
SERVICE STATION
EQUIPMENT

Brookins
SERVICE STATION
EQUIPMENT

BALCRANK PRODUCTS
Wheelabrator-Frye Inc.
400 SOUTH BYRKIT AVENUE • MISHAWAKA, INDIANA 46544

Form 3066 — 6,000 — Amity — 4-75 Printed in U.S.A.